



Catalogue :

LAUNDRY

Chapter :

WASHING MACHINES

Article :

LA-11 TP HW 230V 1N 50/60Hz

Code:

19034734

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	788,00	750,00
Depth	mm	692,00	1.000,00
Height	mm	1.158,00	1.420,00
Weight	kg	212,00	240,00
Volume	m3	0,63	1,07

<u>ELECTRICITY</u>		<u>50/60Hz</u>	
230V			
Power			2,20 kW
Connections	230 V. 1+N+T	2X1,5+T-6A	
	230 V. III+T	3 X 2,5 + T - 20A	
	400 V. III+N+T	4X1,5 + T - 16A	

GAS Not necessary

WATER
Pressure **Water Pres:200-400kPa(2-4bar)**

STEAM Not necessary

AIR Not necessary

DESCRIPTION

HIGH SPIN WASHER EXTRACTOR, LA-11 TP HW
 Made of stainless steel.
 Capacity: 11 kg (1:9) or 10 kg (1:10).
 Microprocessor "Touch Plus Control" with display.
 26 pre-set programs (4 economic programs).
 Possibility of programming, export and import programs through USB memory, without limite.
 "WASH CONTROL" management software included.
 Digital sequence display.
 8 signals for automatic liquid dosing, programmable in time and delay.
 Possibility to install an automatic detergent doser on the rear of the machine.
 Detergent dispenser with 4 compartments (pre-wash, wash, bleachers and softeners).
 Water levels completely modifiable.
 3 water inlets (Hot water, Cold water, Soft water).
 WET CLEANING SYSTEM:
 -Water levels completely modifiable.
 -Possible manual dosing for every 8 signals during the cycle.
 -Minimum washing speed: 15 r.p.m.
 -Minimum thymthm ON-OFF: 1 second.
 Safety switch for door opening.
 Wash and spin speeds are configurable.
 These machines have electronic control of imbalance with frequency variator, that detects the load uncentered before spinning.
 No need to be fixed to the floor.
 Drum diameter: 532 mm.
 Deepth drum: 425 mm.
 Door diameter: 290 mm.
 Spin speed: 1.245 r.p.m.
 G Factor: 450.
 Easy to attach automatic dosser dispenser at rear of machine.
 Water consumption in program n° 2 60°: 135 litres.
 WRAS approved product.
 ETL certified product.
 Heating system: hot water.
 Total electric power: 0,75 kW.
 Dimensions: 692 x 788 x 1.158 mm.

SOUND LEVEL **60,00 db**

<u>INSTALLATION - CONNECTIONS</u>		<u>Ø</u>
▶	ELECTRICITY	SI
▶	SOFT WATER	3/4"
▶	HOT WATER	3/4"
▶	DRAIN	3"
▶	COLD WATER	3/4"





Catalogue :
LAUNDRY


Chapter :
WASHING MACHINES

Article :
LA-11 TP HW 230V 1N 50/60Hz

Code :
19034734

SCHEMA - DIMENSIONS

1	SOAP DISPENSER DISPENSADOR DE JABÓN
2	EMERGENCY STOP PARADA DE EMERGENCIA
3	USB PORT PUERTO USB
4	DRAIN DESAGÜE
5	ELECTRIC CONNECTION LIQUID SOAP PUMP 3 CONEXIÓN ELÉCTRICA BOMBA3 JABÓN LÍQUIDO
6	ELECTRICAL CONNECTION CONEXIÓN ELÉCTRICA
7	MAIN SWITCH INTERRUPTOR GENERAL
8	AUXILIAR WATER INLET TOMA DE AGUA AUXILIAR
9	HOT WATER INLET TOMA DE AGUA CALIENTE
10	GROUND CONNECTION CONEXIÓN A TIERRA
11	COLD WATER INLET TOMA DE AGUA FRÍA
12	BLUR OUTPUT / WATER OVERLOAD DESCARGA DE AGUA SOBRENTE
13	LIQUID SOAP CONNECTION CONEXIÓN DE JABÓN LÍQUIDO
14	STEAM CONNECTION TOMA DE VAPOR

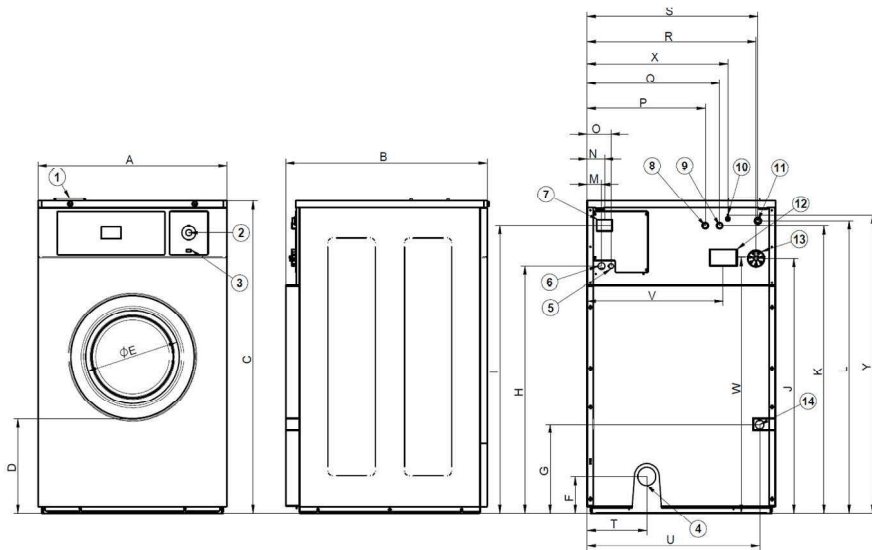

	Unit	LN-11	LN-14	LN-18	LN-25	LN-35	LN-60	LR-11	LR-14	LR-18	LR-25	LA-11	LA-14	LA-18	LA-25	LA-35
A	mm	719	719	788	884	979	1225	719	719	788	884	692	788	884	979	1095
B	mm	697	842	851	965	1066	1280	697	842	851	1011	788	869	913	1041	1184
C	mm	1158	1158	1307	1307	1411	1640	1158	1158	1307	1307	1158	1307	1415	1553	1598
D	mm	310	310	395	440	366	539	310	310	395	440	408	427	490	610	522
E	mm	373	373	373	373	560	560	373	373	373	373	290	373	373	373	560
F	mm	144	144	150	138	143	98	144	144	150	138	93	130	99	130	155
G	mm	440	440	371	543	625	631	440	440	371	543	355	385	390	532	990
H	mm	886	886	1035	1035	1139	1367	886	886	1035	1035	886	1035	1143	1279	1326
I	mm	1055	1055	1203	1203	1307	1535	1055	1055	1203	1203	1055	1203	1207	1343	1494
J	mm	940	940	1067	1053	1142	1385	940	940	1067	1053	940	1067	1166	1282	1344
K	mm	1053	1053	1202	1218	1322	1550	1053	1053	1202	1218	1053	1202	1331	1462	1509
L	mm	1073	1073	1222	1218	1322	1550	1073	1073	1222	1218	1073	1222	1331	1462	1509
M	mm	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61
N	mm	74	74	74	74	74	74	74	74	74	74	74	74	74	74	74
O	mm	101	101	101	101	101	101	101	101	101	101	101	101	101	101	101
P	mm	440	440	494	410	506	750	440	440	494	410	413	494	437	506	621
Q	mm	495	495	554	490	586	830	495	495	554	490	468	554	517	586	701
R	mm	637	637	706	769	864	1110	637	637	706	769	610	706	769	864	979
S	mm	650	650	714	810	906	1150	650	650	714	810	623	714	810	906	1021
T	mm	211	211	248	268	262	270	211	211	248	268	227	243	355	367	384
U	mm	654	654	718	820	917	1163	654	654	718	820	626	718	833	909	1024
V	mm	502	502	570	631	726	972	502	502	570	631	473	570	631	726	842
W	mm	943	943	1070	1057	1146	1390	943	943	1070	1057	943	1064	1170	1283	1350
X	mm	532	532	590	650	745	991	532	532	590	650	503	590	656	745	861
Y	mm	1097	1097	1247	1263	1367	1595	1097	1097	1247	1263	1097	1240	1371	1504	1554